# **ACCESS PANEL FOR OUTDOOR**

System B-EXT - double door







The access panel consists of a sturdy outer frame and a 1 mm thick sheet metal door with insulation inside. The default color is white RAL 9010.

Pre-drilled side holes ensure safe installation in all types of walls.

A special circular gasket on the outer frame ensure a special seal.


### **VERSIONS**

- · RAL lacquered galvanized sheet metal (standard RAL 9010 / other colors on request)
- Stainless steel
- RAL lacquered stainless steel (standard RAL 9010 / other colors on request)

## FIELDS OF APPLICATION

The access panel B-EXT can be installed in each type of solid walls and walls with exterior inulation finishing system.



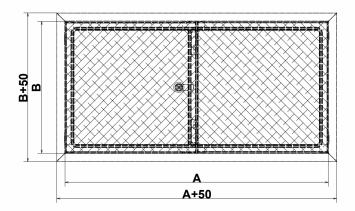





#### **MAXIMUM DIMENSIONS**

- Maximum width 2000 mm / Maximum height 2000 mm
- Maximum perimeter cannot exceed 6400 mm, for each door the following rules applies: Height ≥ Width.

#### **CUSTOMIZED SOLUTIONS**

Customized sizes can be produced in every dimension upon enquiry.

#### PARTICULAR ADVANTAGES

- Economical solution
- Fast delivery
- · Quick and easy installation
- Sophisticated solution
- · Door with isolation
- · Also available in stailnless steel

#### Locks

TL Four-square lock

Z Cylinder lock with key